


# TUBING SPOOLS

Tubing spools are used for single string suspensions. A complete line of tubing hangers is available to give a wide selection of completion choices.

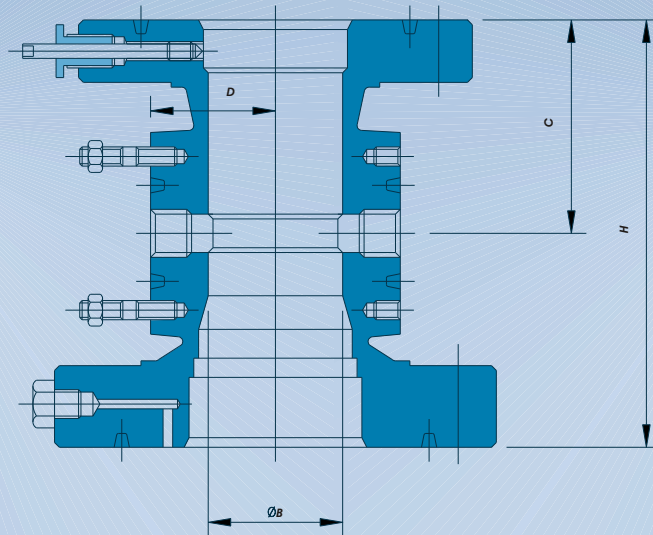

REGULAR							
Flange Size		W.P. (PSI)	Secondary Packing Unit (In - PSI)	Thru Bore B	Height H	Height C	Distance D
Top In- PSI	Bottom In- PSI						
7.1/16	9	2000	9- 2000	6.7/16	22.5/8	11.5/8	5.3/4
7.1/16	11	2000	11- 2000	6.13/16	22.5/8	11.5/8	5.3/4
7.1/16	13.5/8	2000	11- 2000	6.13/16	22.5/8	11.5/8	5.3/4
9	11	2000	11- 2000	8	26.1/4	13	7
9	13.5/8	2000	13.5/8- 2000	8.21/32	26.1/4	13	7
11	13.5/8	2000	13.5/8- 2000				
7.1/16	9	3000	9- 2000	6.7/16	22.5/8	11.5/8	5.3/4
7.1/16	11	3000	11- 2000	6.13/16	22.5/8	11.5/8	5.3/4
7.1/16	13.5/8	3000	11- 2000	6.13/16	22.5/8	11.5/8	5.3/4
9	11	3000	11- 2000	8	26.1/4	13	7
9	13.5/8	3000	13.5/8- 2000	8.21/32	26.1/4	13	7
11	13.5/8	3000	13.5/8- 2000				
7.1/16	9	5000	9- 2000	6.7/16	24.1/2	11.5/8	5.3/4
7.1/16	11	5000	11- 2000	6.13/16	24.1/2	11.5/8	5.3/4
7.1/16	13.5/8	5000	11- 2000	8.13/16			
9	11	5000	11- 2000	8	26.1/2	13	7
9	13.5/8	5000	13.5/8- 2000	8.21/32	26.1/2	13	7
11	13.5/8	5000	13.5/8- 5000				
7.1/16	7.1/16	10,000	7.1/16- 2000	6.7/16	27.1/2	14.1/8	7
7.1/16	9	10,000	9- 2000	6.7/16	27.1/2	14.1/8	7
7.1/16	11	10,000	11- 2000	6.21/32	27.1/2	14.1/8	7
7.1/16	13.5/8	10,000	11- 2000				
9	11	10,000	11- 2000	8	27	13.1/4	7.3/8
9	13.5/8	10,000	13.5/8- 2000				
11	13.5/8	10,000	13.5/8- 5000	10.1/16	29	14.1/2	8.7/8

## Shreeraj Industries

Office & Works:

Block No. 707/ A-2, Nandoli Patia Road,  
RANCHARDA - 382 115, District - Gandhinagar, Gujarat, INDIA.

Phone : +91(79) 2754 2813, 2754 3680

E-mail : info@shreerajindia.com

